

# CC3000C-AZ Series (RoHS 対応品)

三相3線式 500VAC

インバータ二次側専用フィルタ




## 用途

汎用。大型各種インバータ電源の2次側用


## 仕様

Part No.	Rated Current	Weight	Dimensions [mm]										M	
			A	B	C	D	E	F	G	H	J	K		
CC3040C-AZ	40A	2.5Kg	170	122	80	150	135	120	44	120	90	Φ5.5	M5	fig1
CC3050C-AZ	50A	5.0Kg	230	182	100	220	200	180	44	170	140	Φ6.5	M6	
CC3060C-AZ	60A	6.0Kg												
CC3080C-AZ	80A	7.5Kg	267	212	150	250	230	210	57	170	140	Φ6.5	M8	
CC3100C-AZ	100A	8.5Kg												
CC3115C-AZ	115A	9.0Kg												
CC3150C-AZ	150A	10.0Kg	277	222	160	260	240	220	57	170	140	Φ6.5	M8	
Rated Voltage	500VAC													

fig.1

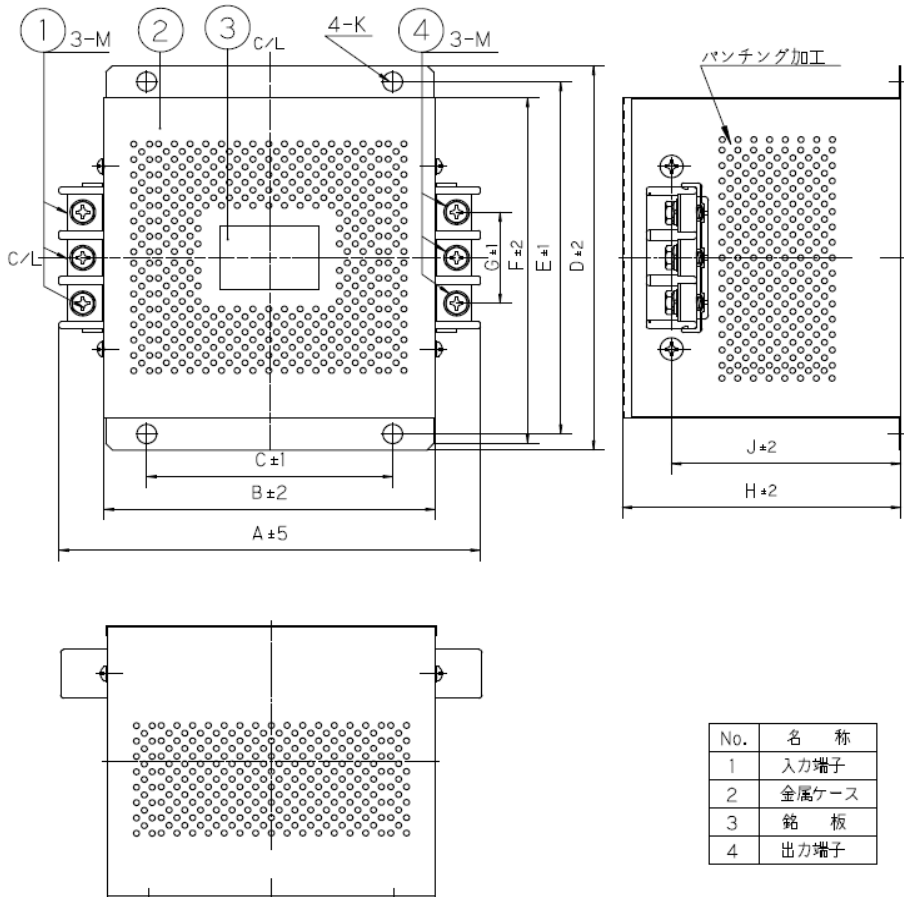

## 代表特性

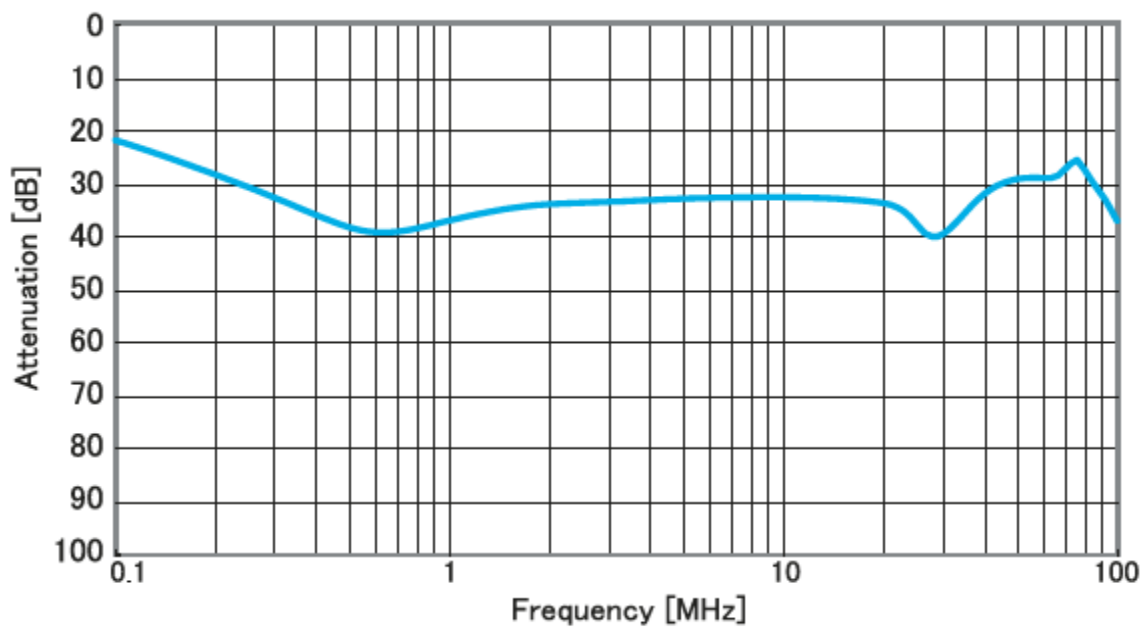

## 回路図

