

# NF3000C-SFE Series (RoHS认证产品)

三相三线式 500VAC

实现了小型化和低个子化  
可追加防止螺丝脱落的功能(可选)  
可以更改回路常数来做到最优化



EN60939-3 (file No.R50366085)  
UL60939-3 (file No.TU50429341)  
CSA C22.2 No.8 (file No.CA72190703)

## 用途

半导体制造装置、大型机床、通用逆变器、伺服等的应用装置、CVCF等的电源装置、电梯电源、工厂电源等

## 规格

Part No.	Rated Current	Weight	
NF3030C-SFE	30A	0.4kg	fig1
NF3060C-SFE	60A	0.9kg	fig2
Rated Voltage	500VAC		
Leakage Current	0.2mA MAX 500VAC 60Hz (By IEC60939-3) 3.3mA MAX 500VAC 60Hz (By UL60939-3)		
Ambient temp.	-20 up to 50 Deg.C		

fig.1 (30A)



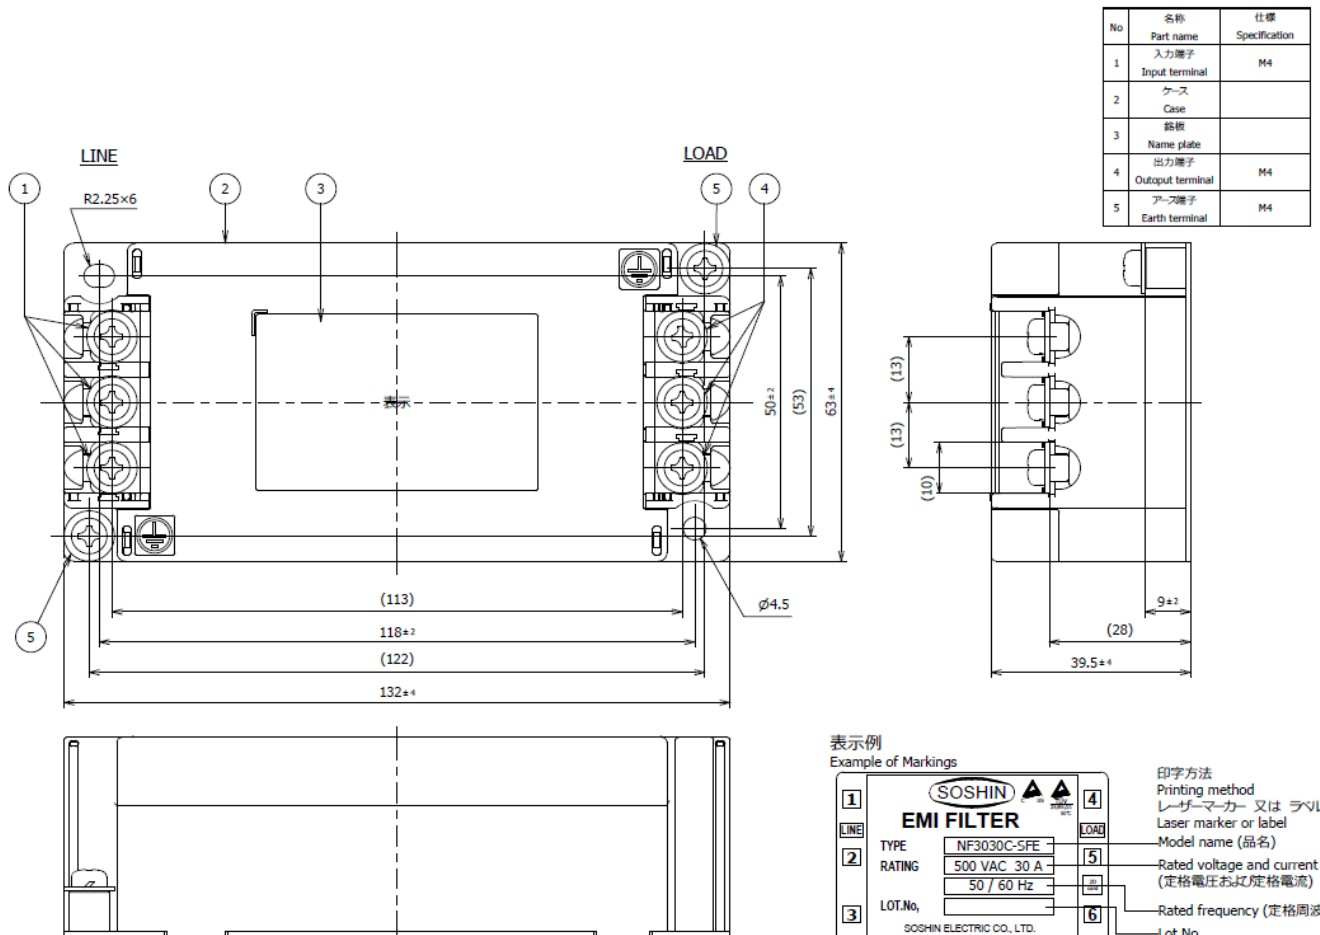



fig.2 (60A)

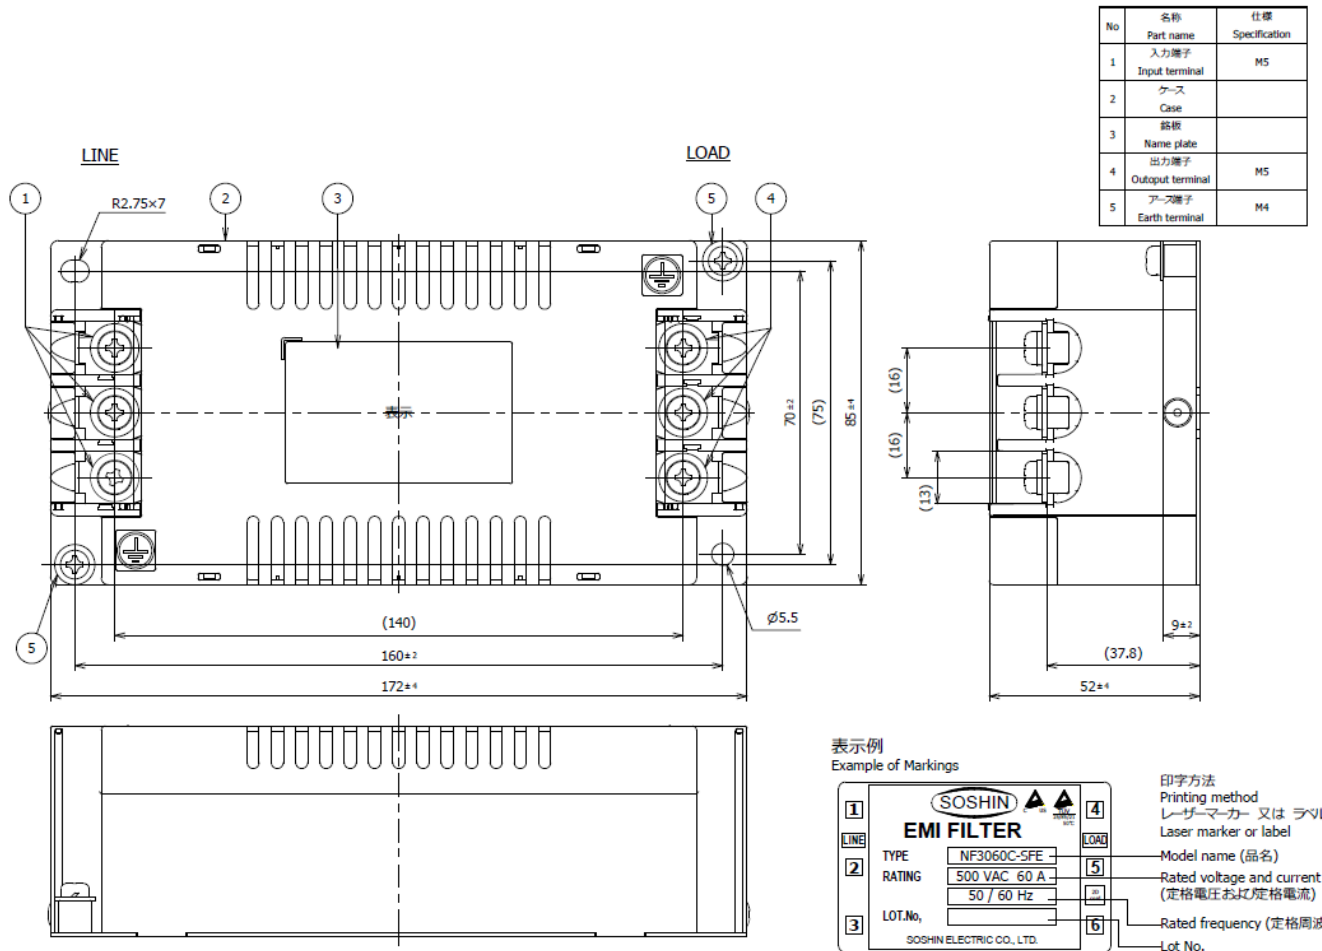

代表特性(30A)

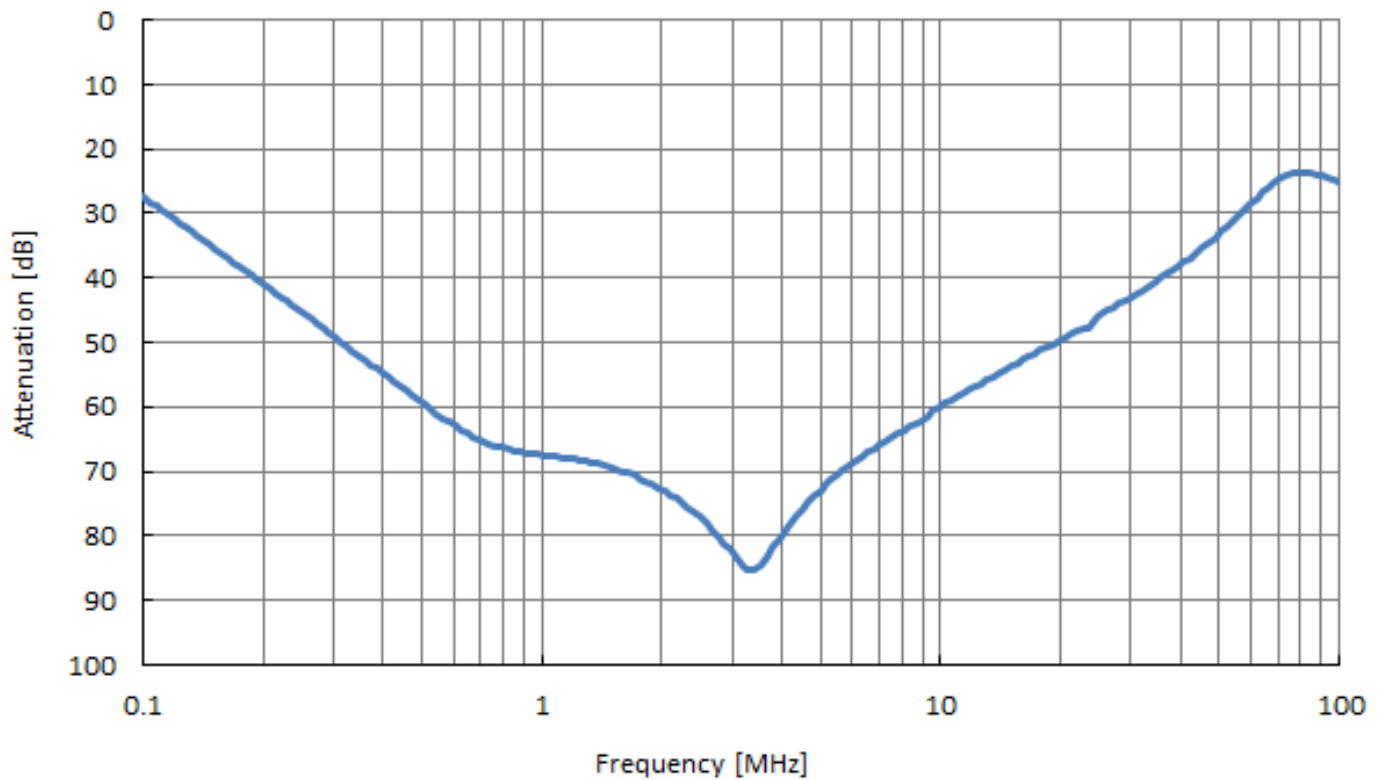

## 代表特性(60A)

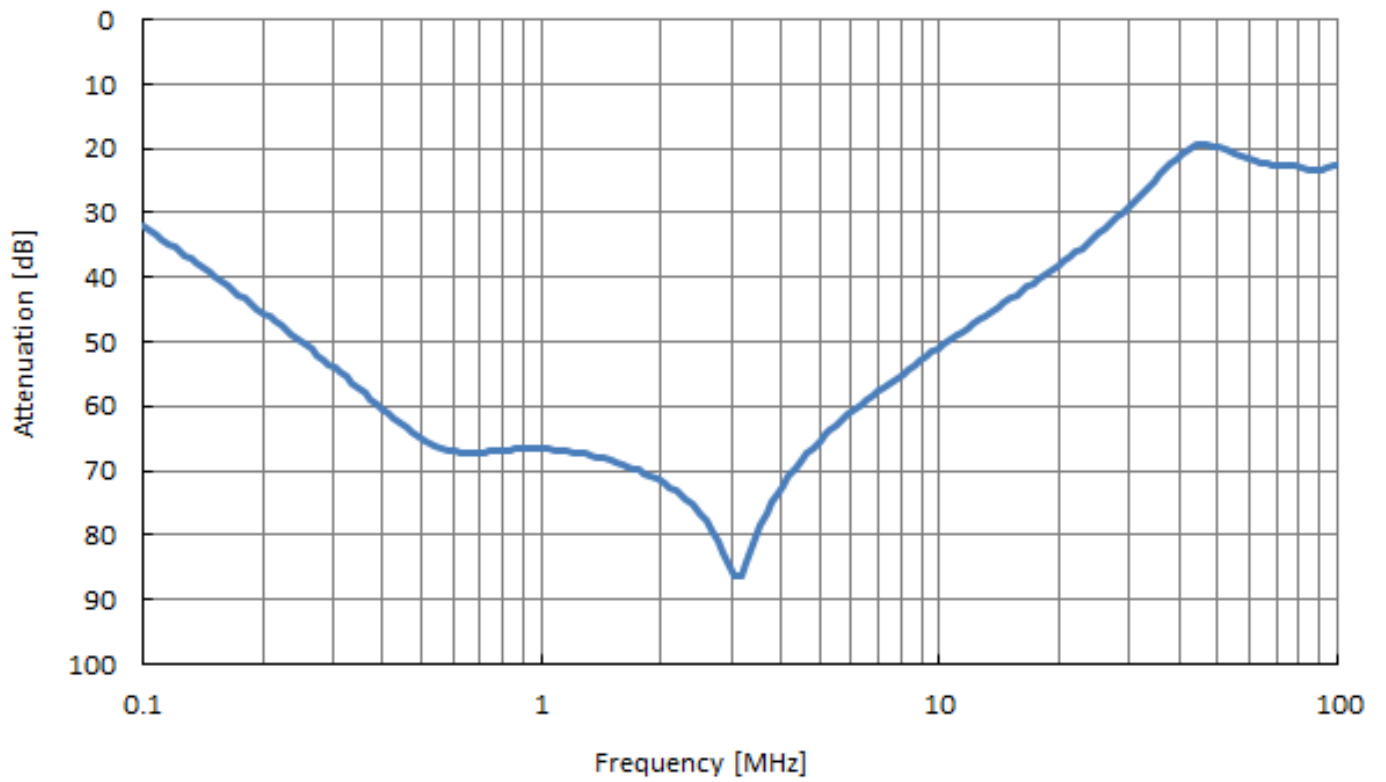

## 回路图

