

# Product Information


Control No. : ARP-4616400-G 1

Issued on May 16, 2024

## 1. Type No.

HMD6164B

## 2. Dimension (Unit : mm)

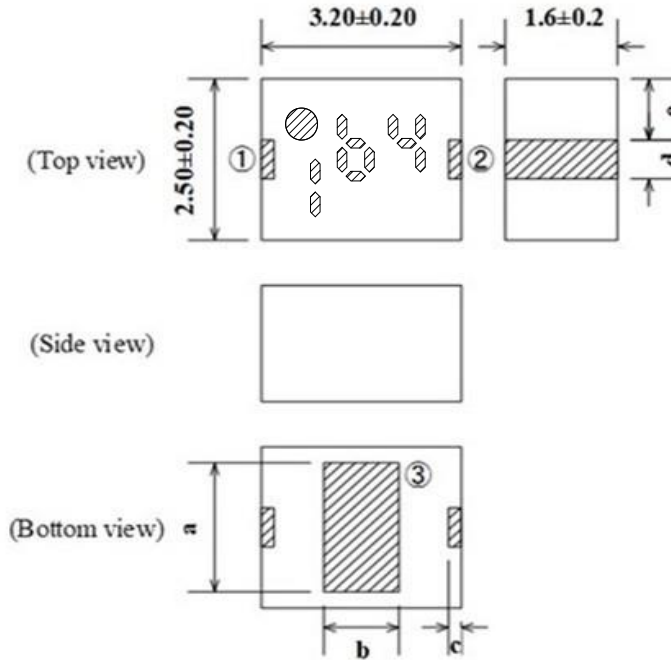

Measured Data

RoHS Compliant Part

Terminal	
①	Input
②	Output
③	GND

Terminal Dimensions	
a	2.00 Typ.
b	1.20 Typ.
c	0.30±0.15
d	0.60±0.20
e	0.95 Typ.

## 3. Electrical characteristics

Parameters	Specification	Measured	Unit	Remark
Frequency range	3200-4000	-	MHz	
Nominal Impedance	50	-	ohm	
Insertion loss at 25degC.	1.5 Max.	1.01	dB	
Ripple	1.2 Max.	0.50	dB	
V.S.W.R.	1.67 Max.	1.24		
Attenuation	at 250 MHz - 1055 MHz	20 Min.	36.8	dB
	at 1895 MHz - 2700 MHz	25 Min.	32.9	dB
	at 4845 MHz - 5650 MHz	15 Min.	42.8	dB
	at 6145 MHz - 6950 MHz	30 Min.	48.8	dB
	at 7795 MHz - 8600 MHz	15 Min.	44.9	dB
	at 9095 MHz - 9900 MHz	15 Min.	50.4	dB
	at 10745 MHz - 11550 MHz	20 Min.	43.4	dB
at 12045 MHz - 12850 MHz	15 Min.	28.8	dB	

## 4. Note

4.1 Operating Temperature Range

: -40 to +85 deg C.

4.2 Storage Temperature Range before soldering in taping package

: -20 to +35 deg C.

4.3 Standard Reel Quantity


: 2,000 pcs (per reel, per bag)

Approved by	Confirmed by	Raised by
Y. Imai	S.Suzuki	R.Takahashi

SOSHIN ELECTRIC CO., LTD.


## 5. Representative characteristics

Measured Data

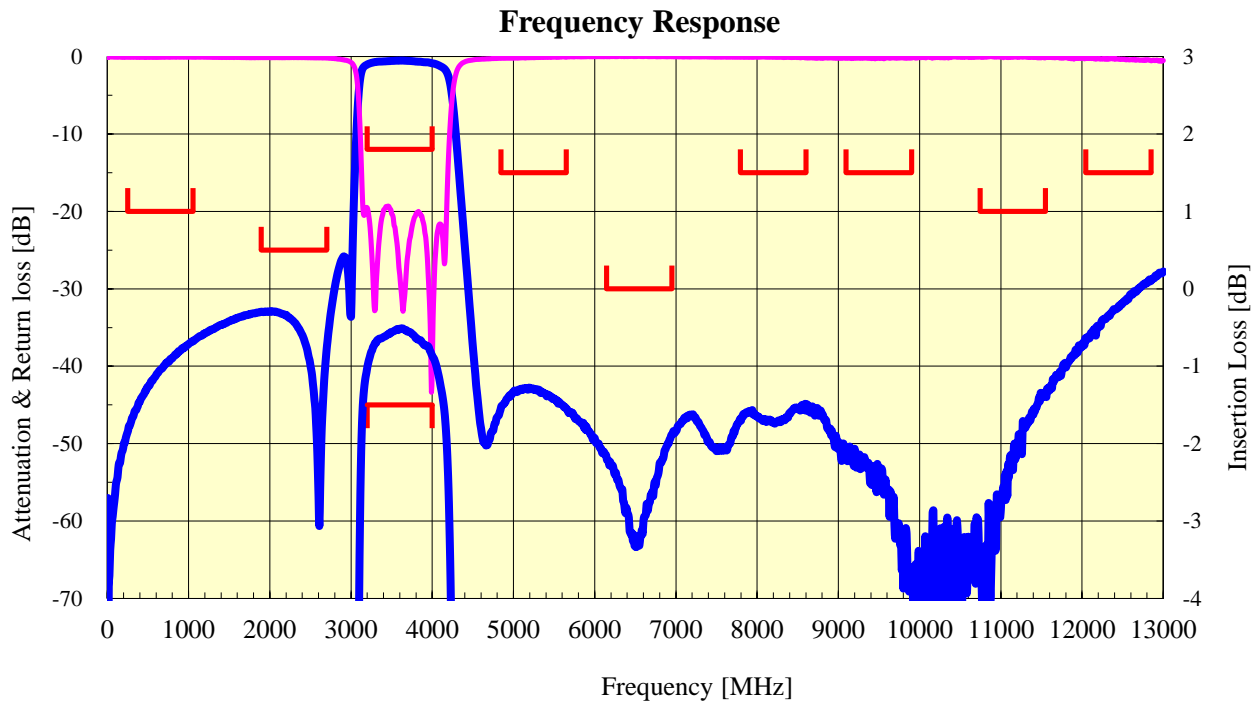


## 6. Recommended Land Pattern

### \*Land Pattern

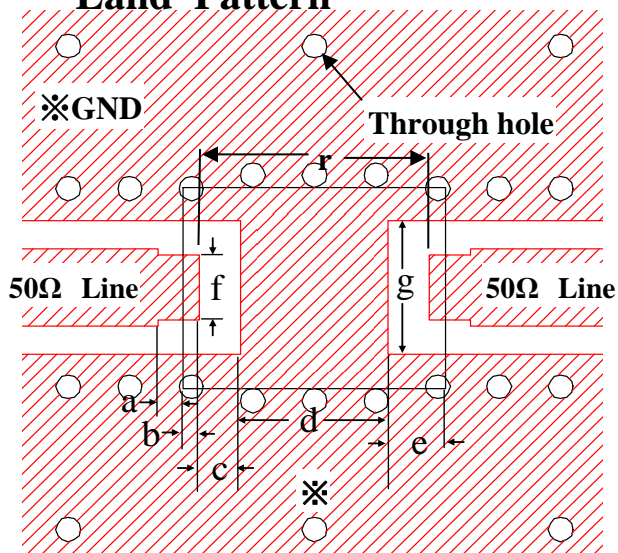

a 0.30 mm	e 0.45 - 0.80 mm
b 0.20 mm	f 0.80 mm
c 0.25 - 0.60 mm	g 1.66 mm
d 1.60 - 2.30 mm	r 2.80 mm

### \*Resist Pattern

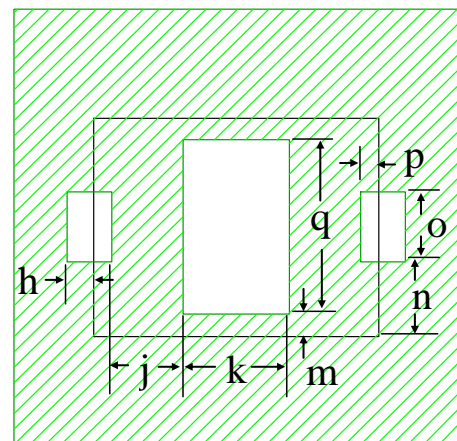


h 0.30 mm	n 0.85 mm
j 0.80 mm	o 0.80 mm
k 1.20 mm	p 0.20 mm
m 0.25 mm	q 2.00 mm

## 7. Packing method

### 7. 1 Taping conditions


Taping conditions are shown below. Refer to IEC60286-3

- (1) Tape must be wound clockwise with the feeding hole coming to the right hand side.
- (2) Top cover tape must not cover feeding holes of carrier tape and/or show out of carrier tape.
- (3) A blank section carrying no chips of a length of 160mm min. on ending section and 100mm min. on leading section must be provided.
- (4) A leading section of 400mm min. must be provided on top cover tape.

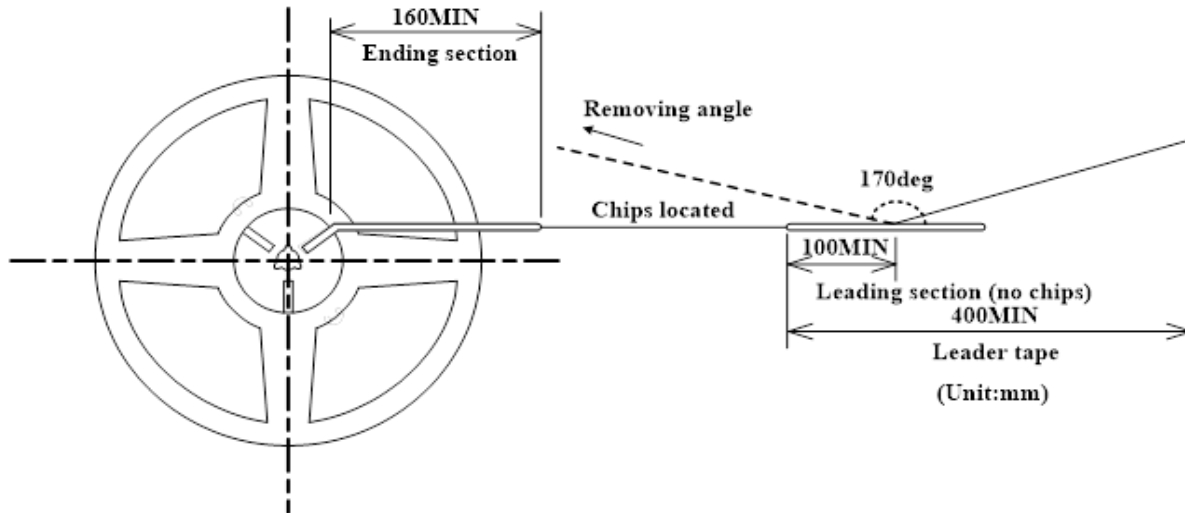

- (5) To end tape winding, the leading section of top cover tape must be stuck on a side of a reel with adhesive tape.
- (6) Removing force of top cover tape in the unwinding with an angle of 170 degrees between the removed side of a reel and carrier tape must be 0.1 to 1.0N.
- (7) When the embossed tape is turned upside down with the sealing tape peeled off, the filter body inside of the tape must fall off and the mounter must not cause a take-up mistake.
- (8) A sticker carrying Soshin product №, quantity, lot №, inspection date is to be placed on the specified side of reels. And Lot No. means our production control number. The shipment records are available if requested.

A ticker is placed on opposite side on the feeding hole side of carrier tape

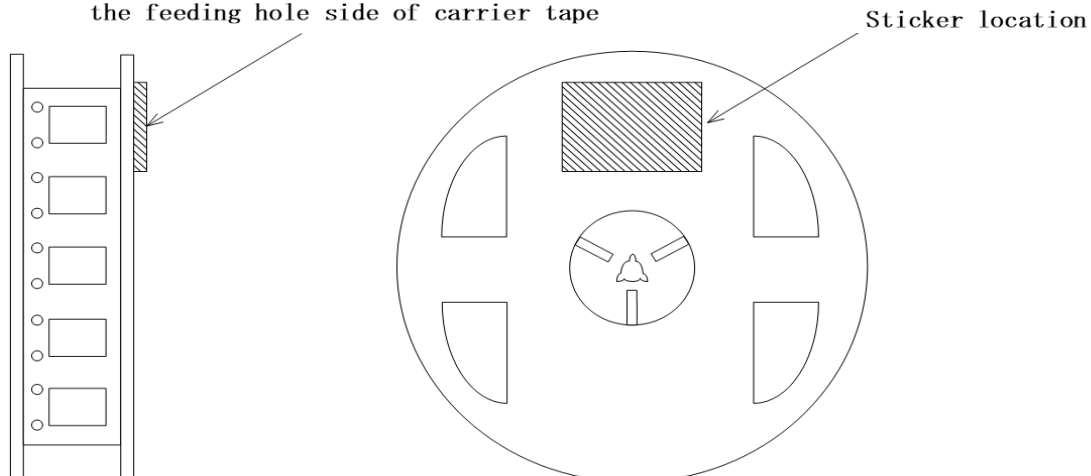


# Product Information

Control No. : ARP-4616400-G 4

Issued on May 16, 2024

(9) Product orientation must be consistent. Products must not be positioned out of the mounting location.

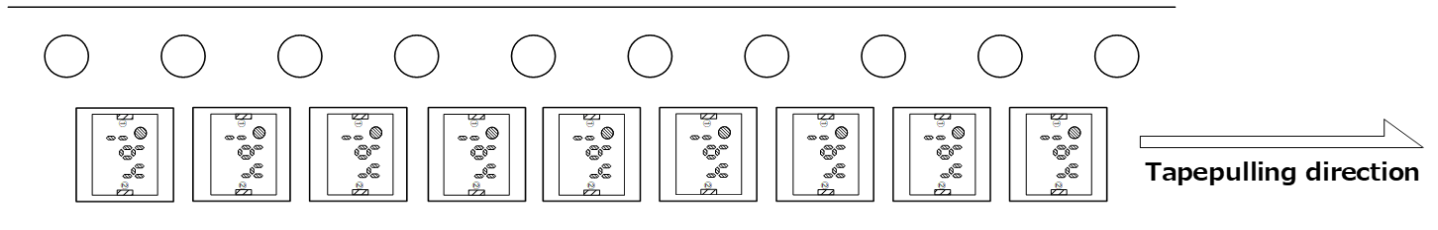


(10) A taping reel must be sealed in a plastic bag, individually.


(11) Tape-packaged quantity

The quantity is 2,000 pcs per single tape-package as a rule.

## 7. 2 Dimensions of the carrier tape (Unit : mm)

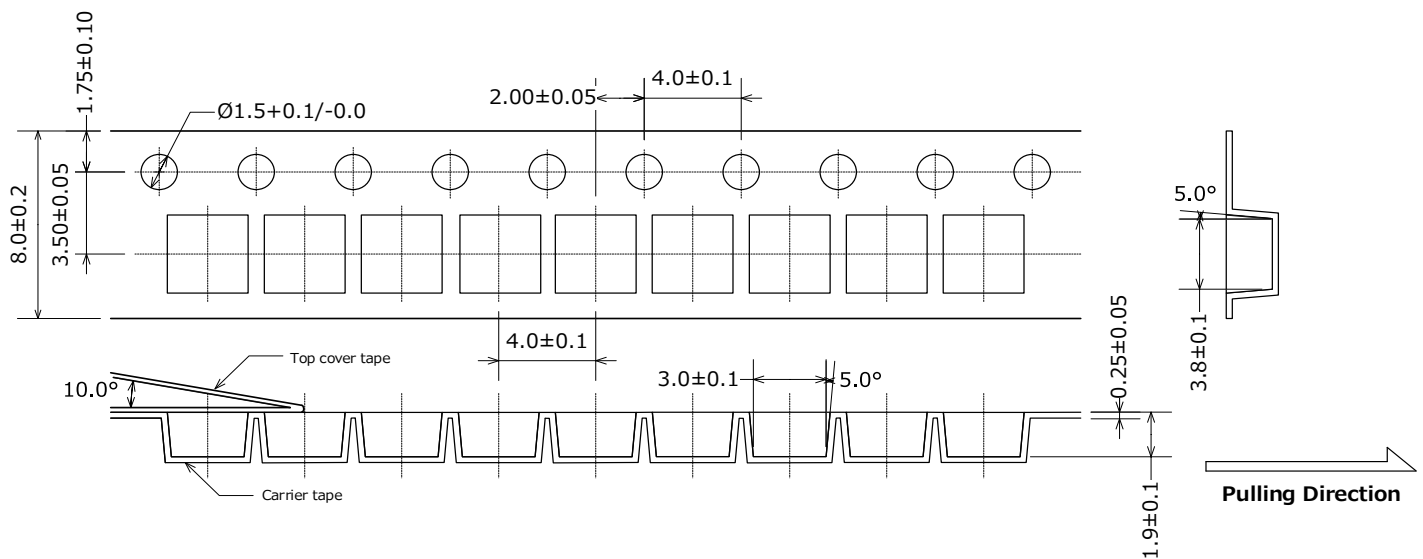

## 7. 3 Carrier tape reel dimensions (Unit : mm)

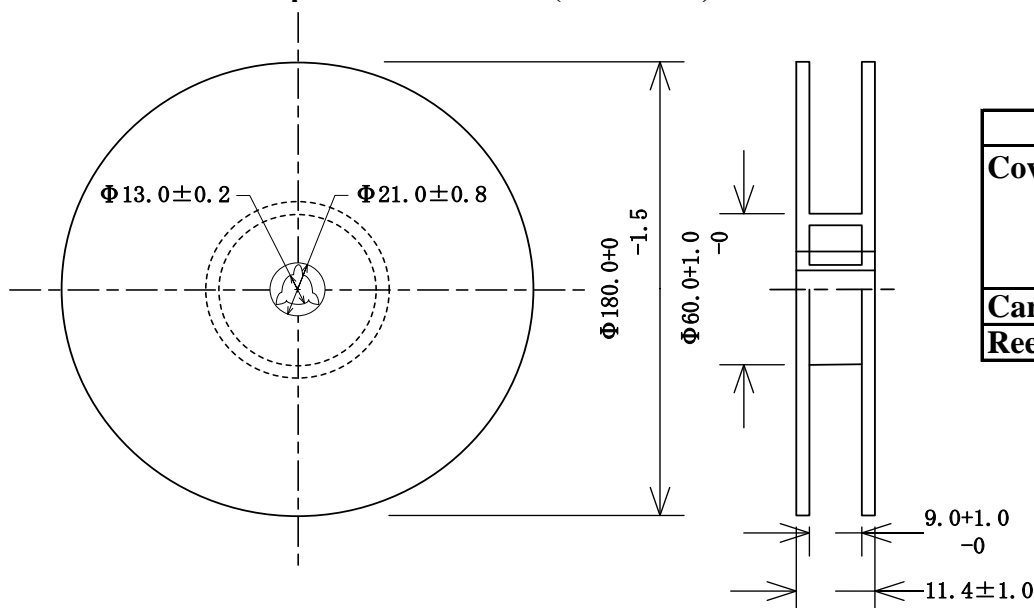

Material	
Cover tape	Polyester + LDPE + PSresin + Conductive coat
Carrier tape	PS+Carbon
Reel	PS