

LP15MHz-1553


用途

スタジオデジタル

性能

LP15MHz-1553	
Zin/Zout	75 ohm (Unbaranced)
Insertion Loss	3.5dB max (at 500KHz)
Pass Band Ripple	0.1dBp-p max (0.1 up to 15MHz)
Attenuation	6.0dB min (at 18.5652MHz)
	40dB min (22.125 up to 27.125MHz)
	50dB min (27.125 up to 50MHz)
Group Delay	279+/-5ns max (at 500KHz)
	2.0nsp-p max (0.1 up to 10MHz)
	3.0nsp-p max (0.1 up to 15MHz)

形状寸法

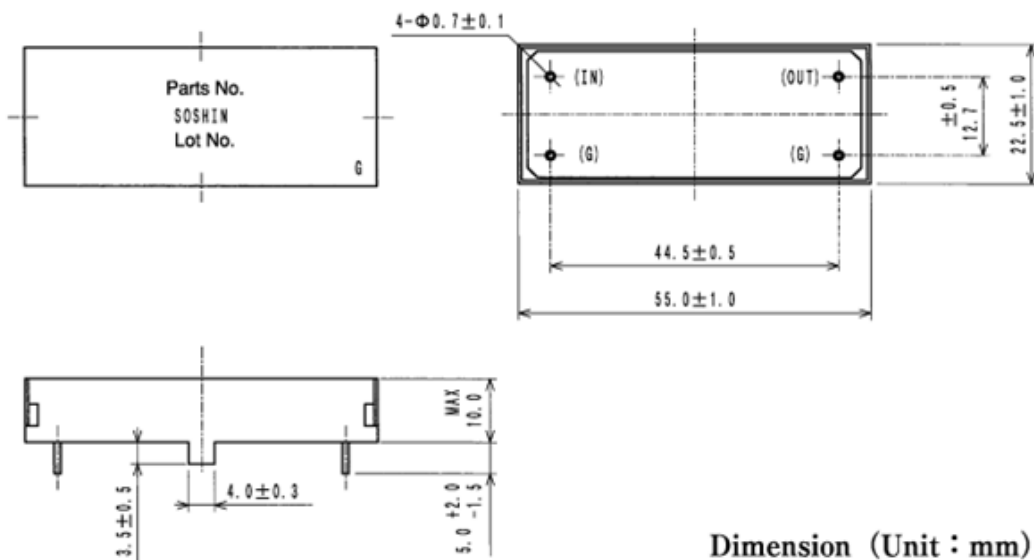

代表特性

