


NF3000C-RxB Series (RoHS认证产品)

三相三线式 500VAC

小型、省空间、大电流单级线圈型滤波器

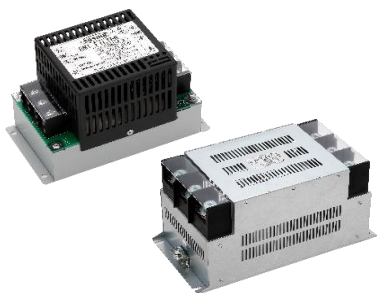

EN60939 (file No.R50705432)

UL60939 (file No.TU50705473 TUVus)

SCCR对应品

- ・与断路器组合取得
- ・若为Listed认证品, 可使用任何厂家的断路器

用途

半导体制造设备、大型机床、大型機器人、通用变频器、伺服等应用设备等

规格

Part No.	Rated Current	SCCR value	Weight	
NF3080C-RxB	80A	22kA	1.6kg	fig.1
NF3100C-RxB	100A			
NF3150C-RxB	150A	30kA	2.8kg	fig.2
NF3200C-RxB	200A	42kA	6.5kg	fig.3
NF3250C-RxB	250A			
NF3300C-RxB	300A			
NF3400C-RxB	400A		9.5kg	fig.4
Rated Voltage	500VAC			
Leakage Current	80-150A 0.3mA max 200-400A 0.7mA max 500VAC 60 Hz (By IEC60939-3)(Y结线通常状态) 80-150A 7.2mA max 200-400A 15.2mA max 500VAC 60 Hz (By UL60939-3)(Y结线一相欠相状态) 80-150A 5.8mA max 200-400A 12.2mA max 200VAC 60 Hz Δ结线一相接地电源			
Ambient temp.	-40 up to 50 Deg.C			

fig.1 (80A、100A)

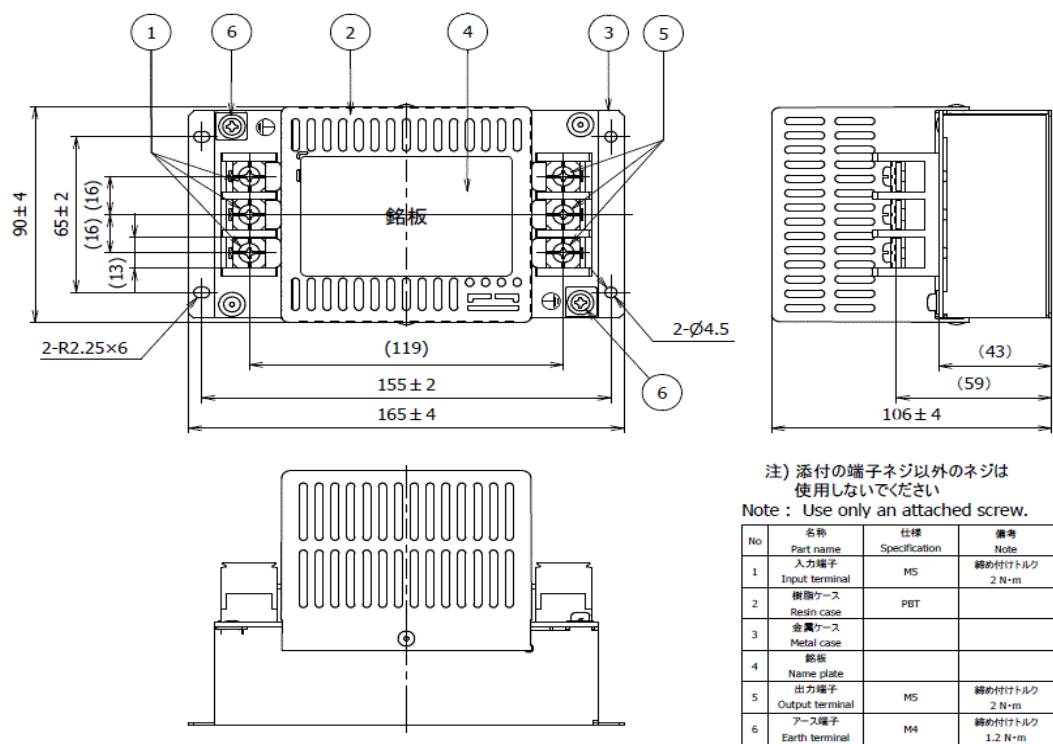


fig.2 (150A)

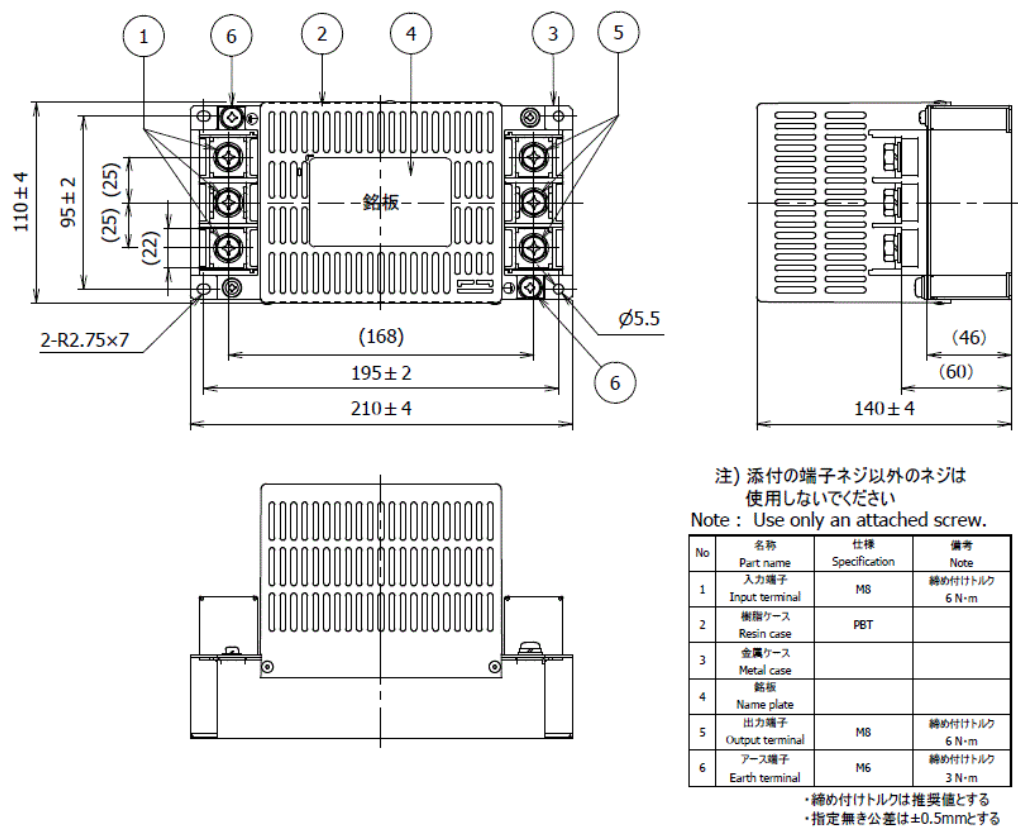


fig.3 (200A、250A、300A)



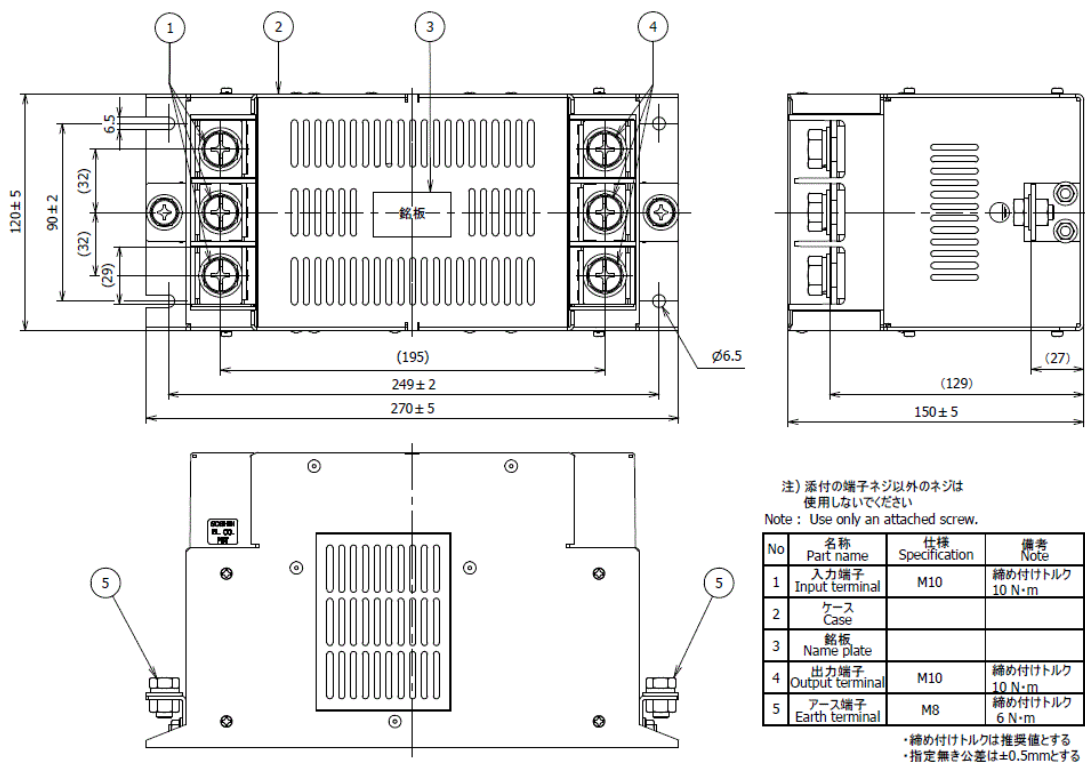


fig.4 (400A)

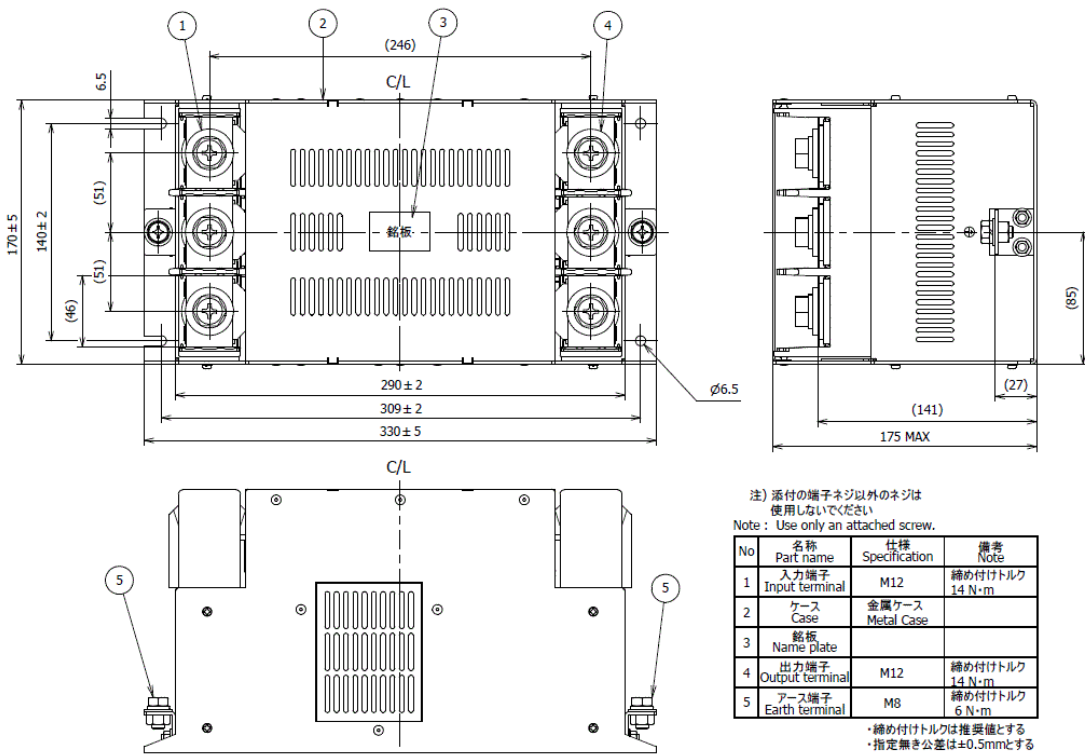

代表特性 (Typical)

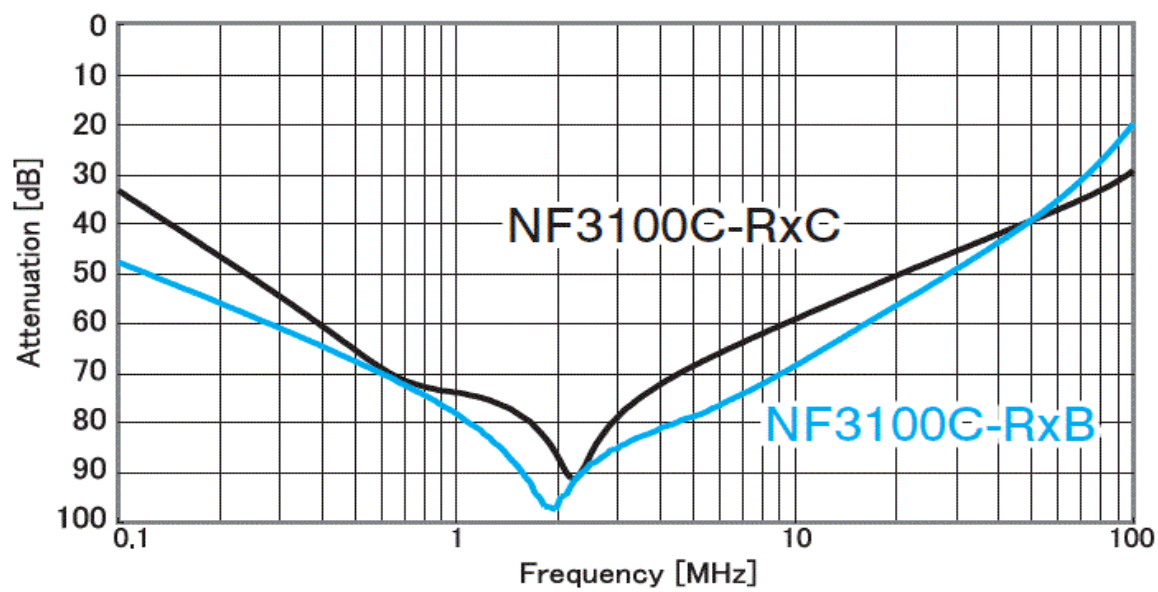

电路图

