

NF3000C-YXZ Series (RoHS认证产品)

三相三线式 500VAC

省空間书状型

中性点接地電源用



Type Approved
Safety
Regular Production
Surveillance
www.tuv.com
ID 2900000000

UL60939-3 (file No.TU504610)
EN60939-3 (file No.R50557702)

用途




半导体制造装置、大型机床、通用逆变器、伺服等的应用装置、CVCF等的电源装置、
电梯电源、工厂电源等

规格


Part No.	Rated Current	Weight	Dimensions [mm]												
			A	B	C	D	E	F	G	H	J	K	L	M	
NF3010C-YXZ	10A	0.5kg	110	100	50	40	95	M4	M4	M4	R2.25×6	dia.4.5	9	11	fig1
NF3020C-YXZ	20A														
NF3030C-YXZ	30A														
NF3040C-YXZ	40A	0.8kg	128	120	65	55	95	M5	M5	M4	R2.25×6	dia.4.5	13	16	
NF3050C-YXZ	50A														
NF3060C-YXZ	60A														
NF3080C-YXZ	80A	1.6kg	fig2												
NF3100C-YXZ	100A														
NF3125C-YXZ	125A	2.8kg	fig3												
NF3150C-YXZ	150A														
NF3200C-YXZ	200A	6.9kg	fig4												
NF3250C-YXZ	250A	8.1kg													
NF3300C-YXZ	300A														
Rated Voltage	500VAC max														
Leakage Current	176.9mA max 500VAC 60Hz By UL60939-3														
Ambient temp.	-20 up to 50 Deg.C														

※用于中性点接地电源（在中性点接地电源中，无欠相时不会流过所记载的漏电流）

fig.1 (10~60A)

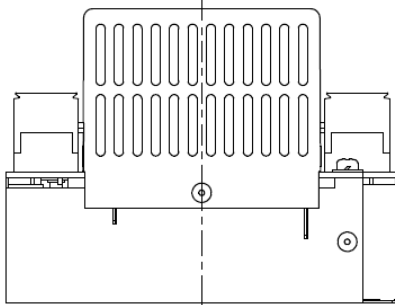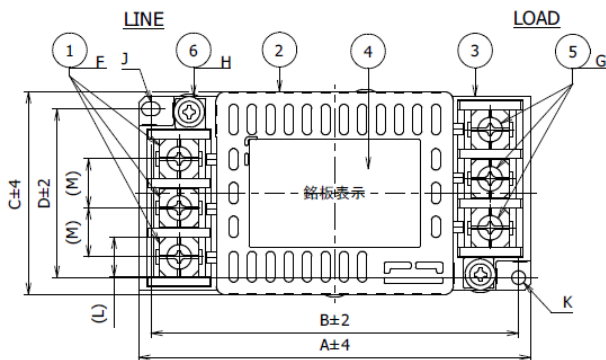

銘板表示例: NF3060C-YXZ
Example of Name plate



Model name (品名)
Rated voltage and current
(定格電圧および定格電流)
Rated frequency (定格周波数)
Lot No. (ロットNo.)

fig.2 (80, 100A)

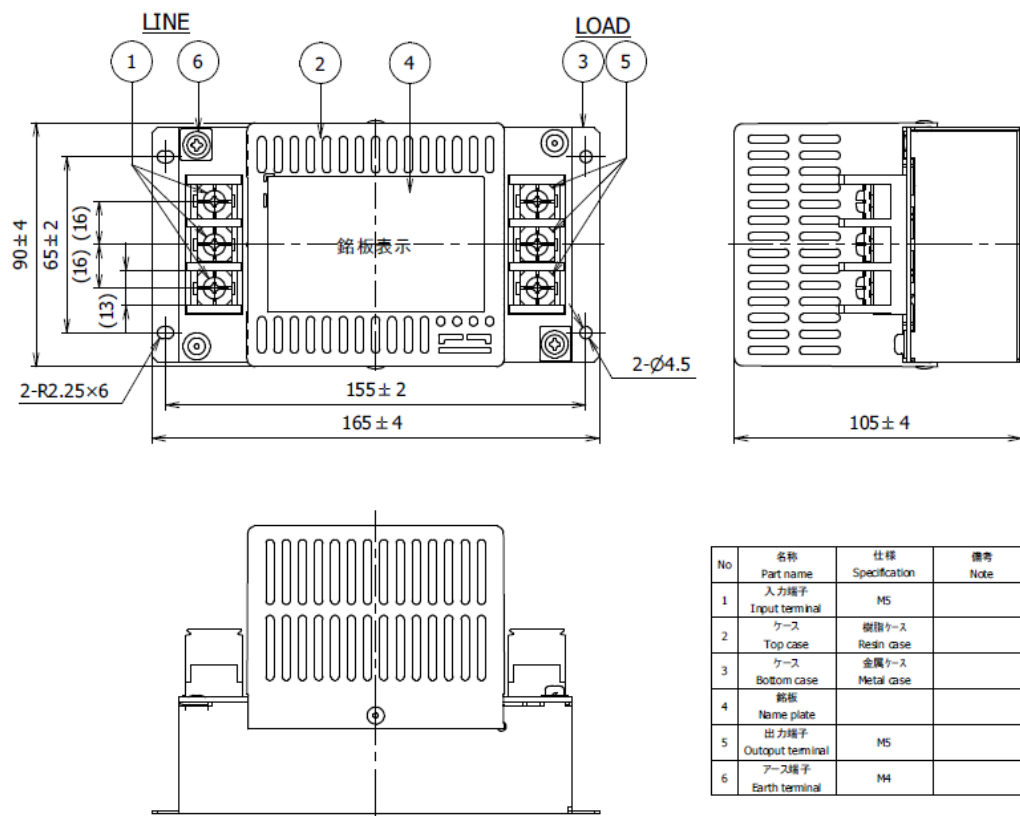


fig. 3 (125, 150)



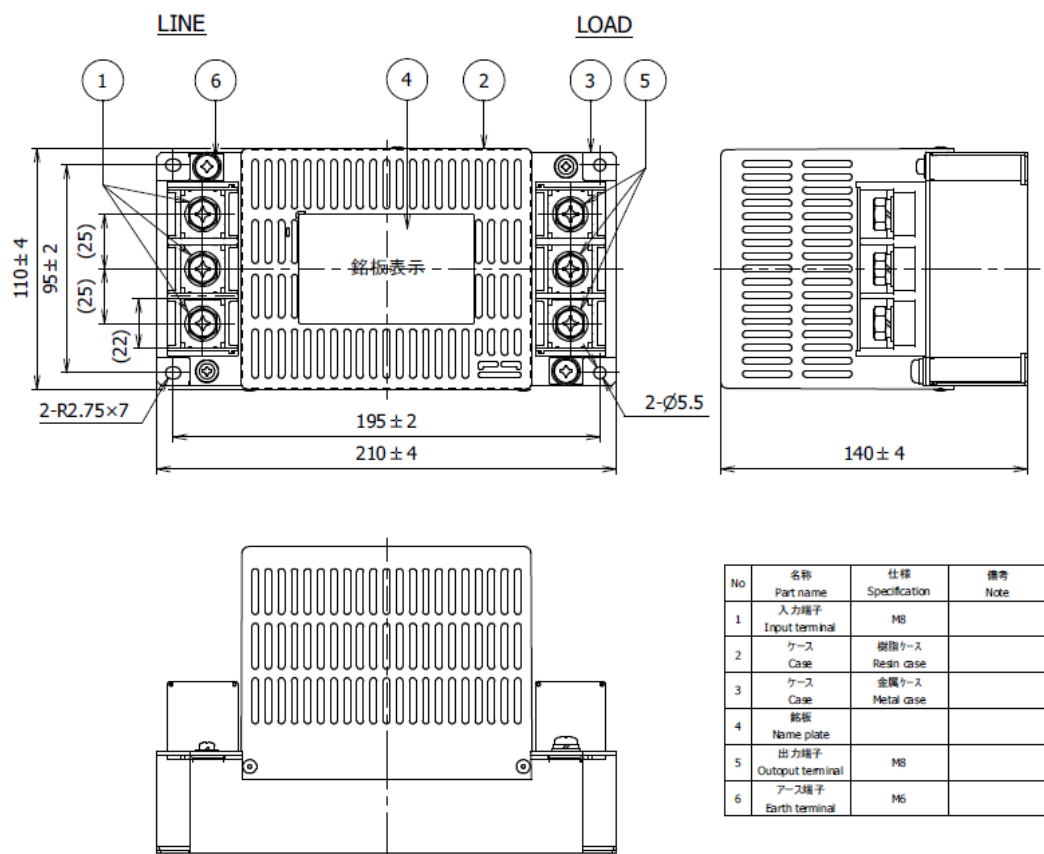



fig. 4 (200~300A)

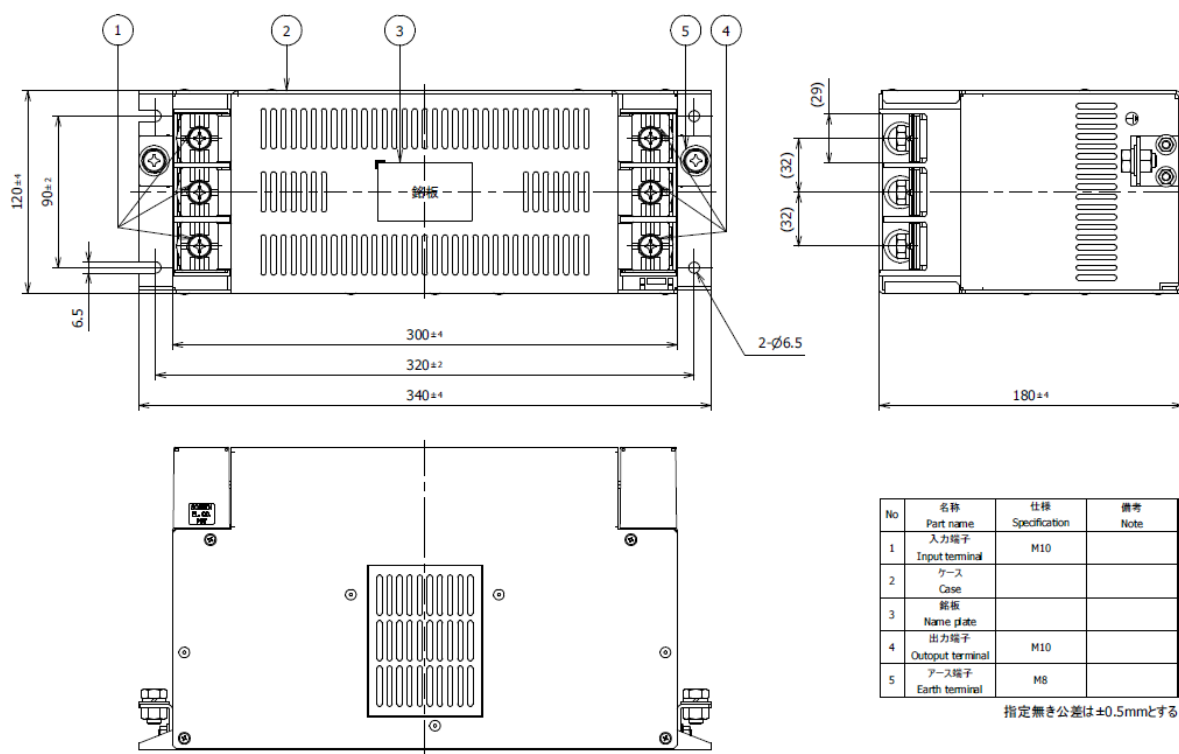


代表特性 (10, 20, 30A)

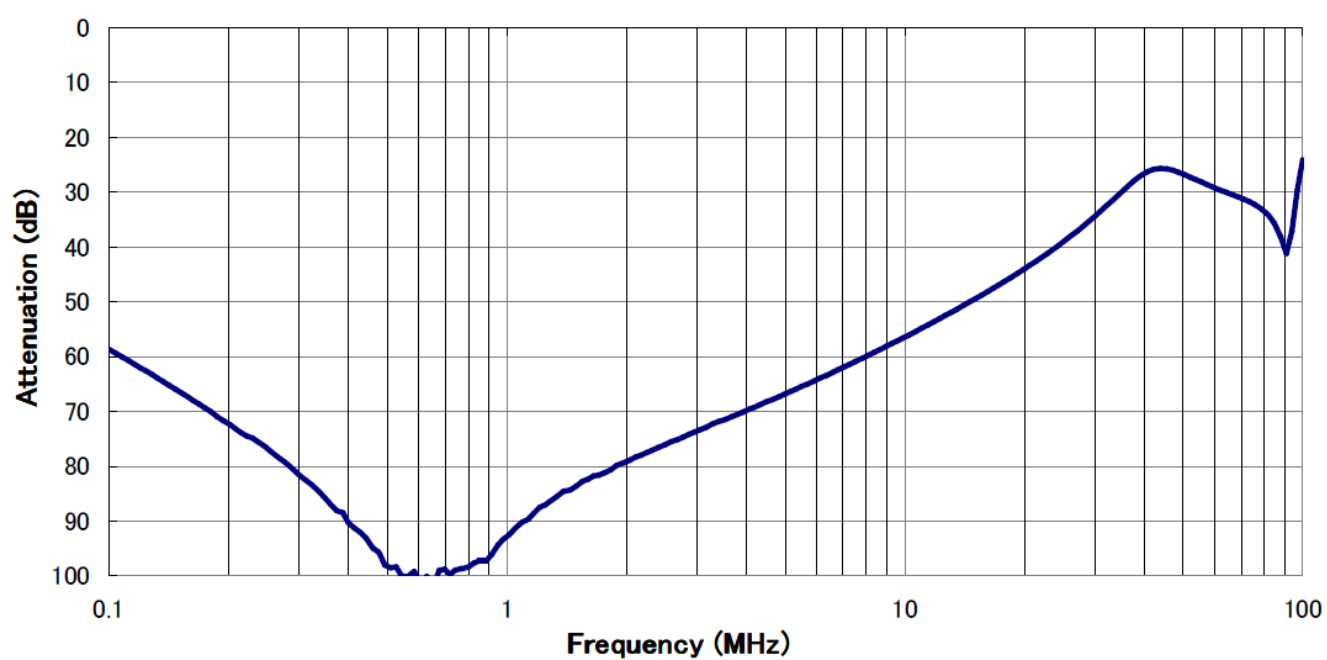


代表特性 (40, 50, 60A)

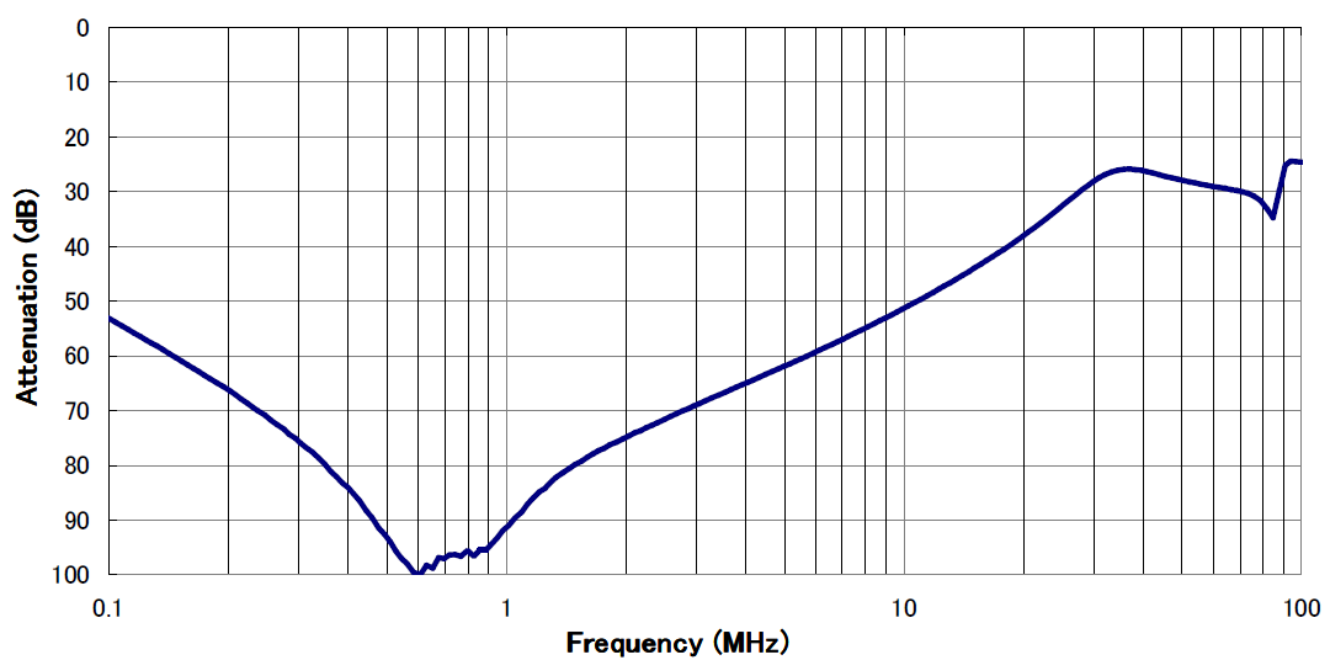

代表特性 (80, 100A)

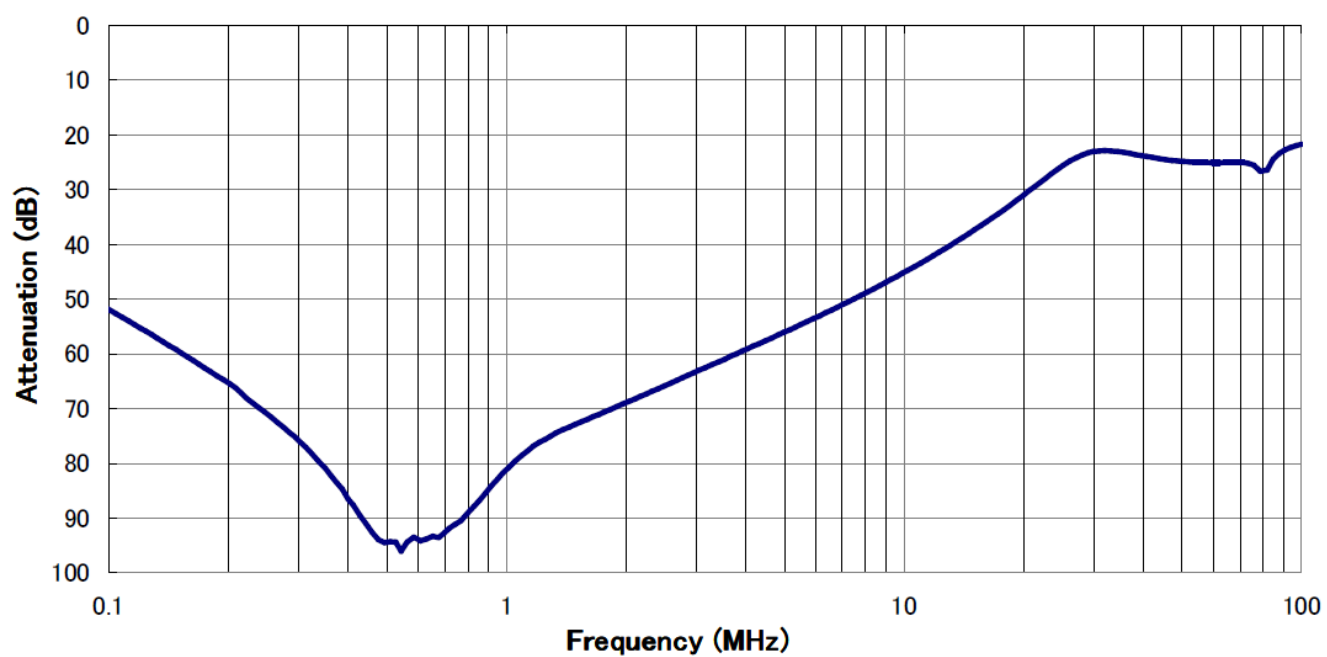

代表特性 (125, 150A)

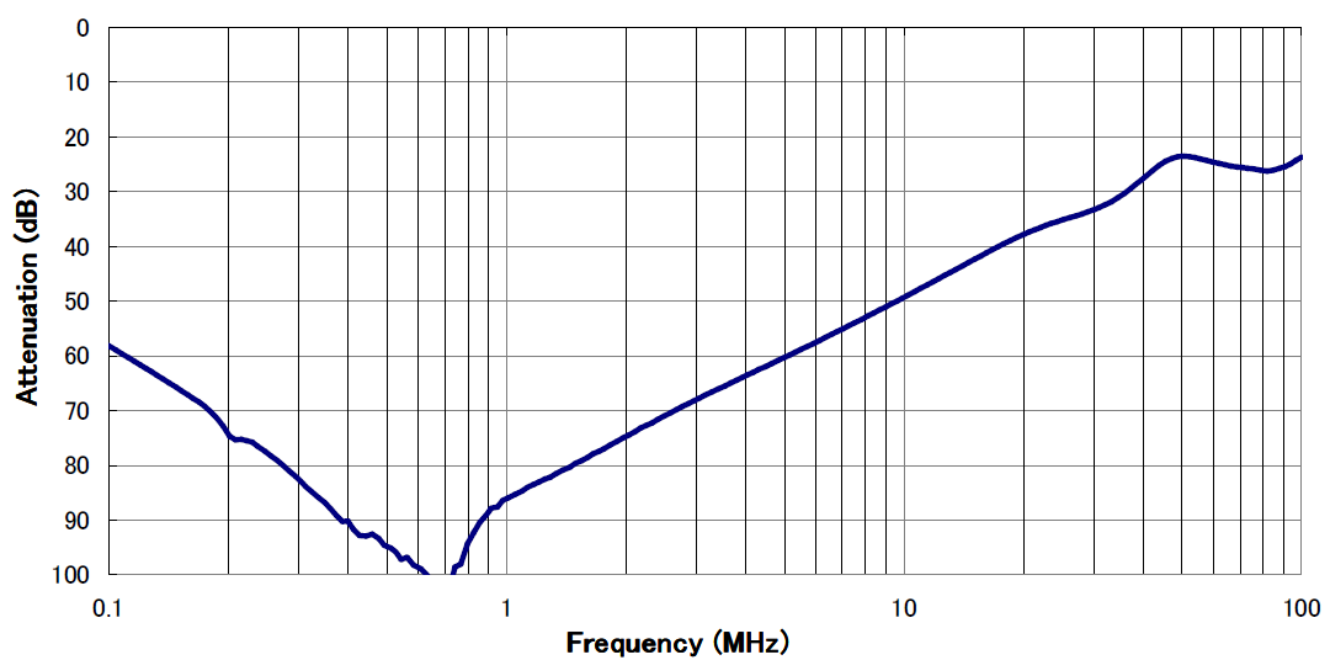

回路図

