

NF3400C-ZQA Series (RoHS Compliant)

3-phase 3-line 480VAC

Small, low-profile, space-saving noise filter



UL60939-3 (file No.TU50595909)
EN60939-3 (file No.R50595908)

SCCR compliant

- Acquired in combination with breaker
- Any manufacturer's breaker certified as the listed products can be used


Applications

Semiconductor manufacturing equipment, etc.

Specifications



Part No.	Rated Current	SCCR value	Weight	
NF3400C-ZQA	400A	42kA	20.0Kg	fig1
Rated Voltage	500VAC max			
Leakage Current	0.4mA MAX 500VAC 60Hz (By IEC60939-3) 10mA MAX 500VAC 60Hz (By UL60939-3) 8mA MAX 200VAC 60Hz (a corner-grounded Delta system)			
Ambient temp.	-40 up to 50 Deg.C			

fig. 1

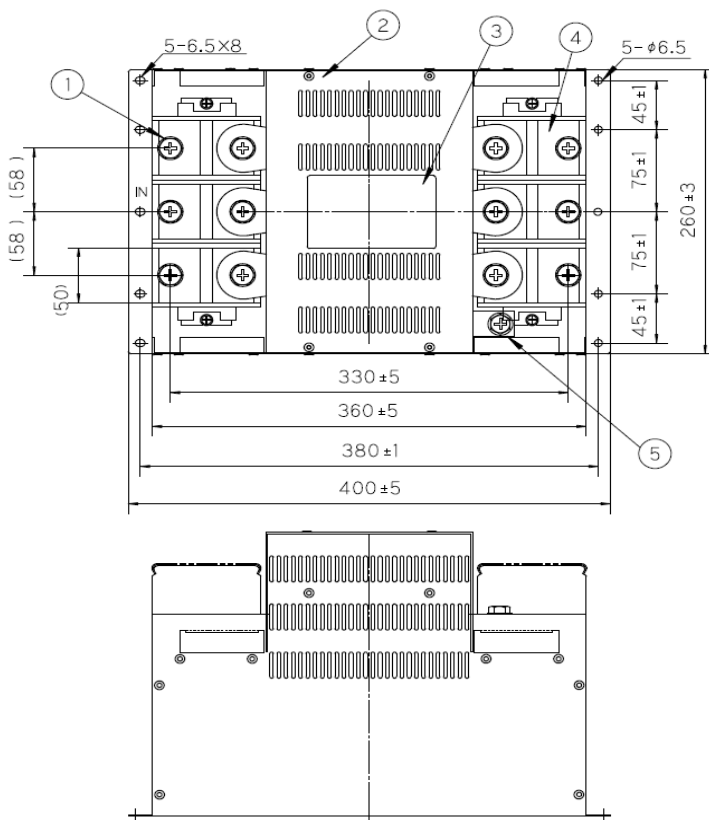


No.	名称 Item	備考 Notes
1	入力端子 INPUT terminal	M12
2	金属ケース Metal case	
3	銘板 Label	
4	出力端子 Output terminal	M12
5	接地端子 Earthing terminal	M10

銘板表示例
Example of Name plate

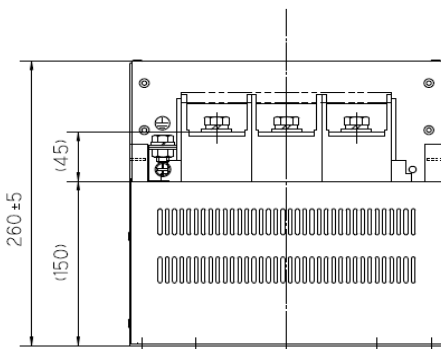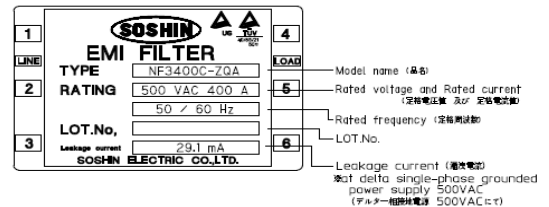

Attenuation Characteristics

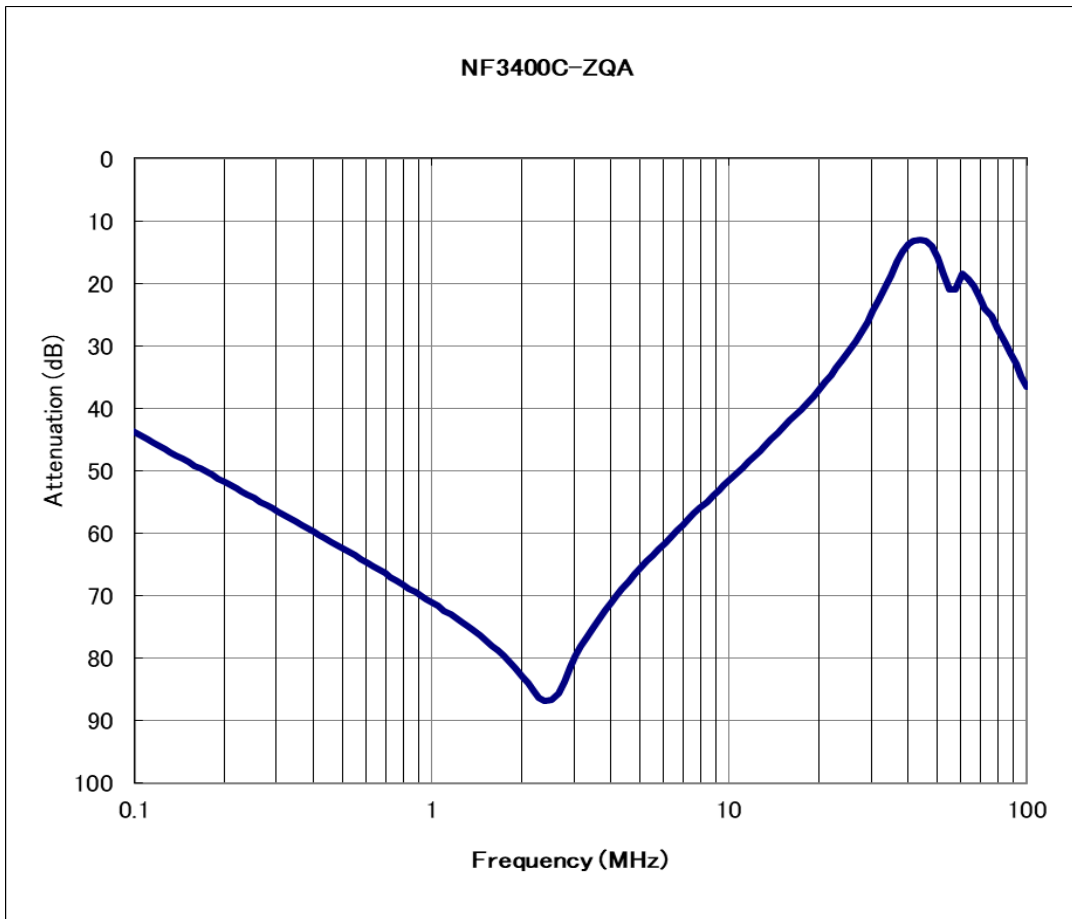

Circuit Diagram

