

NF3000C-VZ4 Series (RoHS 対応品)

三相3線式 500VAC

低背大電流

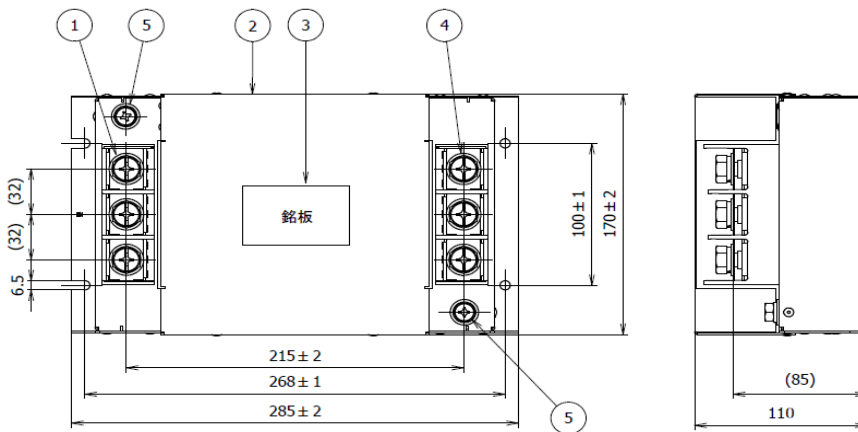

UL60939-3 (file No.TU50609164)
EN60939-3 (file No.R50609162)

用途

半導体、工作機械など

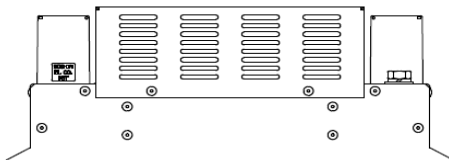
仕様

Part No.	Rated Current	Weight	
NF3200C-VZ4	200A	5.0Kg	fig1
NF3250C-VZ4	250A	5.0Kg	
NF3300C-VZ4	300A	5.5Kg	
Rated Voltage	500VAC max		
Leakage Current	0.1mA MAX 500VAC 60Hz (By IEC60939-3) 3mA MAX 500VAC 60Hz (By UL60939-3) 2mA MAX 200VAC 60Hz (デルタ結線一相接地電源)		
Ambient temp.	-40 up to 50 Deg.C		

fig. 1


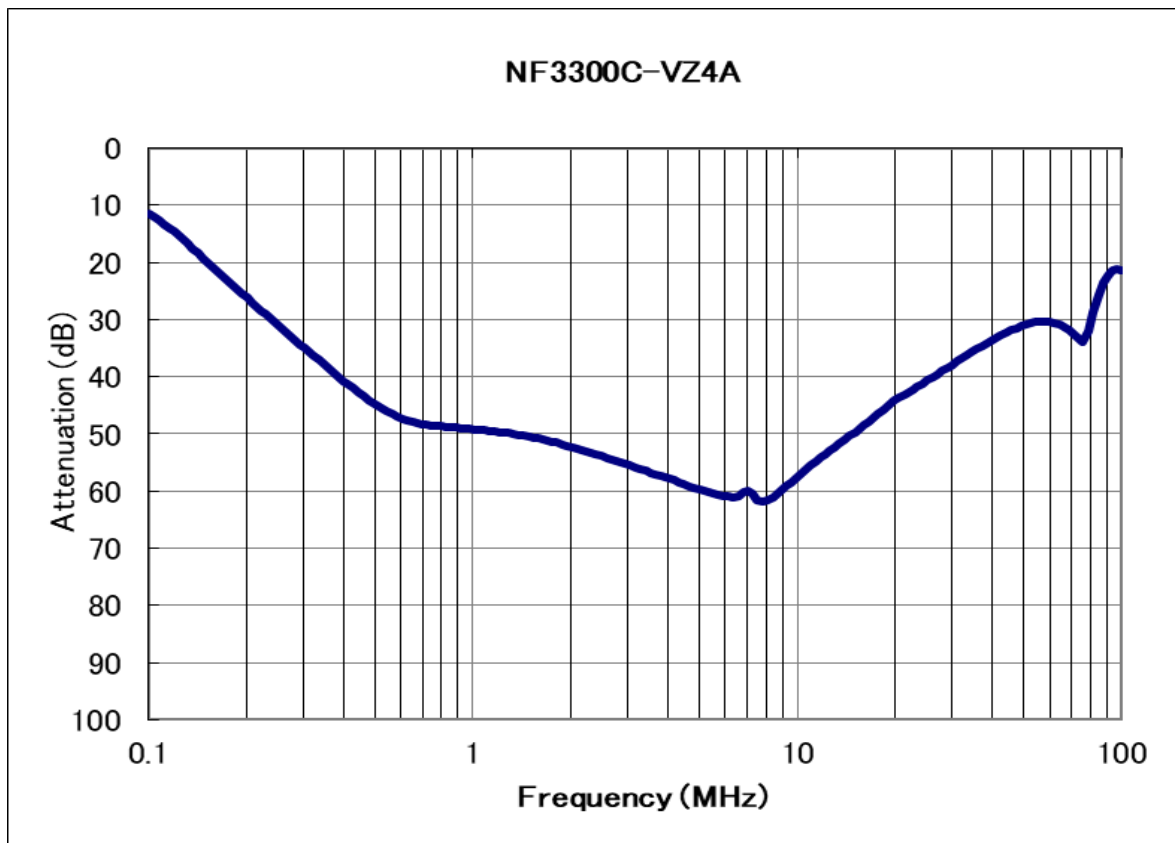
No	名称 Part name	仕様 Specification	備考 Note
1	入力端子 Input terminal	M10	
2	ケース Case		
3	銘板 Name plate		
4	出力端子 Output terminal	M10	
5	アース端子 Earth terminal	M8	

注) 添付の端子ネジ以外のネジは
使用しないでください
Note : Use only an attached screw.

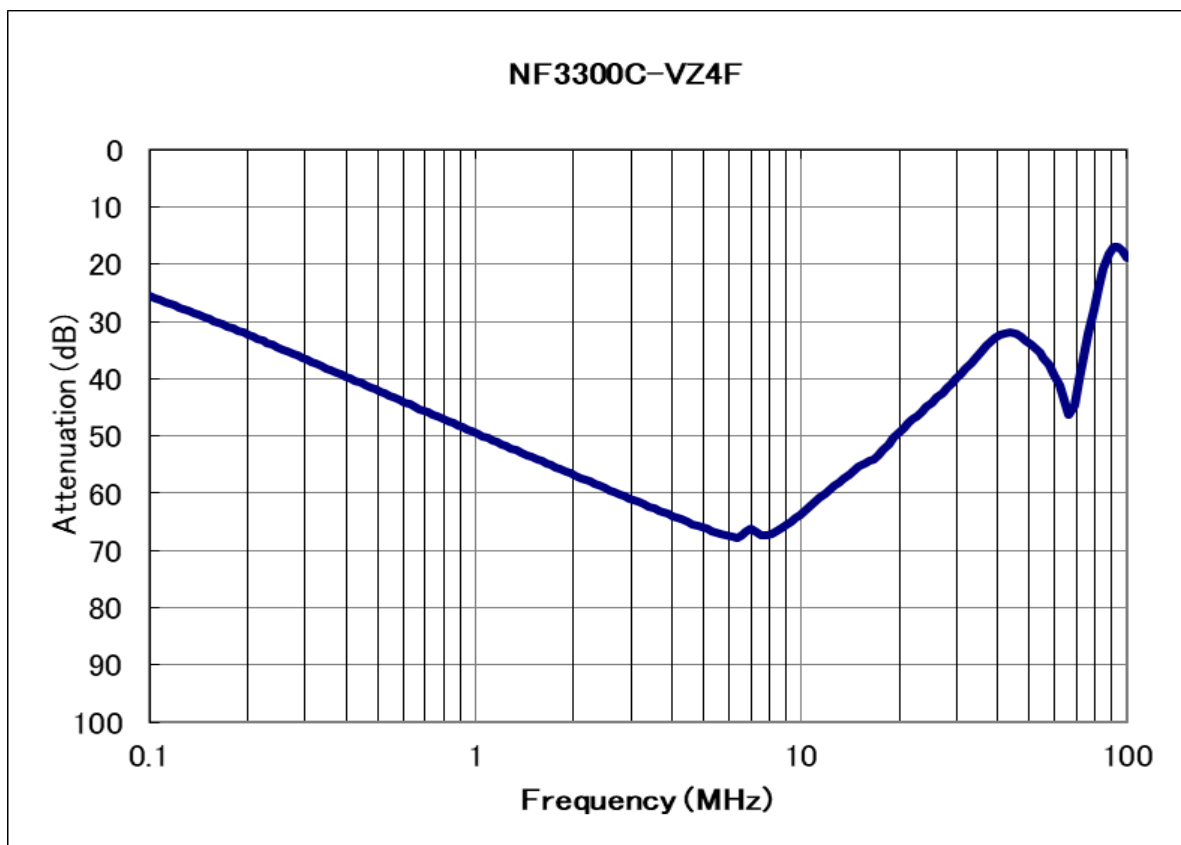

 銘板表示例: NF3200C-VZ4A
 Example of Name plate

LINE	TYPE	LOAD	
1	SOSHIN EMI FILTER		
2	TYPE	NF3200C-VZ4A	Model name (品名)
	RATING	500 VAC 200 A	Rated voltage and current (定格電圧および定格電流)
		50 / 60 Hz	Rated frequency (定格周波数)
	LOT.No.		Lot No. (ロットNo.)
	Leakage current	7mA	Leakage current (漏れ電流)
3	SOSHIN ELECTRIC CO., LTD.		

減衰特性 (NF3300C-VZ4A)



減衰特性 (NF3300C-VZ4F)



回路图

