
Control No.: ARP-482000- G1


Issued on May 29, 2024

1. Type No.

HMD820F

2. Dimension (Unit: mm)

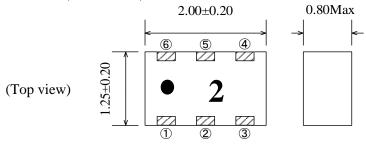

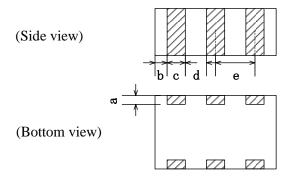

Measured data

RoHS Compliant Part

Terminal					
(1)	GND				
2	Input				
3	GND				
4	Output1				
(5)	GND				
6	Output2				

Terminal Dimensions				
a	0.15typ.			
b	0.20typ.			
c	0.30 ± 0.15			
d	0.35 ± 0.15			
e	0.65 ± 0.15			

3. Electrical characteristics

Pass band		Specification	Typical	Unit	Remark
Pass band frequency		700-1000	-	MHz	
Nominal impedance		50	-	ohm	
Insertion Loss at 25degC.		0.6 Max.	0.48	dB	
Input Return Loss	800-1000MHz	14 Min.	18.6	dB	
	700-1000MHz	13 Min.	18.6	dB	
Isolation		17 Min.	18.4	dB	
Amplitude balance		0.8 Max.	0.04	dB	
Phase balance		4 Max.	0.21	deg	

4. Note

4.1 Operating Temperature Range

4.2 Storage Temperature Range

4.3 Max input power (Avg/CW)

4.4 Standard Reel Quantity

: -40 to +105 deg.C

: -40 to +85 deg.C (goods alone)

: -20 to +35 deg.C (In a Taping Package)

: 3W

: 2,000 pcs (per reel, per bag)


Approved by	Confirmed by	Raised by
Y.Imai	S.Suzuki	M.Kawano


Control No.: ARP-482000- G2


Issued on May 29, 2024


5.Representative characteristics




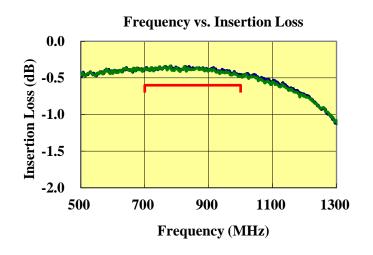

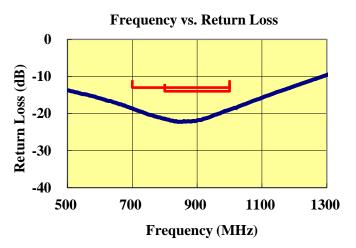

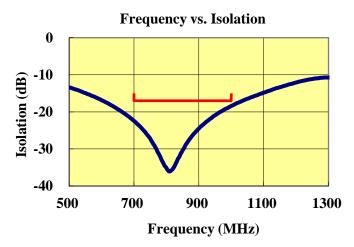

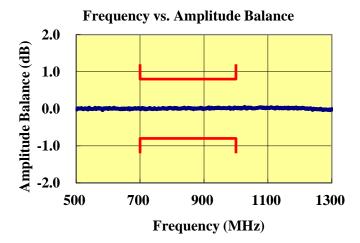


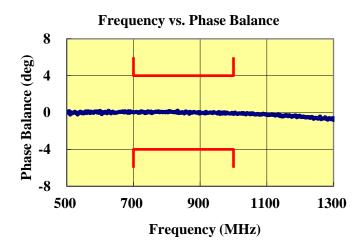


Control No.: ARP-482000- G3

Issued on May 29, 2024

6.Measurement Circuit

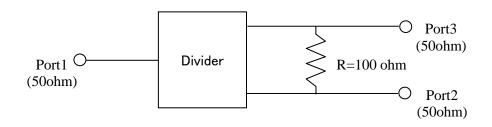

7.Recommended Land Pattern (Unit:mm)

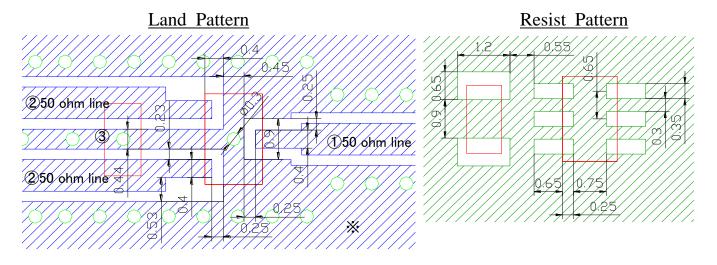

- ① Input
- ② Output1,2
- ③ 1608Size R=100ohm
- ₩ GND

Control No.: ARP-482000-G

Issued on May 29, 2024


4

8. Packing method


8. 1 Taping conditions

Taping conditions are shown below. Refer to IEC60286-3

- (1) Tape must be wound clockwise with the feeding hole coming to the right hand side.
- (2) Top cover tape must not cover feeding holes of carrier tape and/or show out of carrier tape.
- (3) A blank section carrying no chips of a length of 160mm min. on ending section and 100mm min. on leading section must be provided.
- (4) A leading section of 400mm min. must be provided on top cover tape.

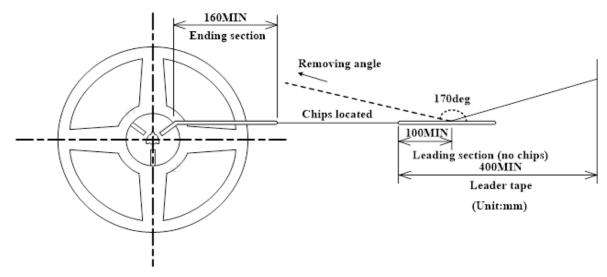

- (5) To end tape winding, the leading section of top cover tape must be stuck on a side of a reel with adhesive tape.
- (6) Removing force of top cover tape in the unwinding with an angle of 170 degrees between the removed side of a reel and carrier tape must be 0.1 to 1.0N.
- (7) When the embossed tape is turned upside down with the sealing tape peeled off, the filter body inside of the tape must fall off and the mounter must not cause a take-up mistake.
- (8) A sticker carrying Soshin product №, quantity, lot №, inspection date is to be placed on the specified side of reels. And Lot No. means our production control number. The shipment records are available if requested.

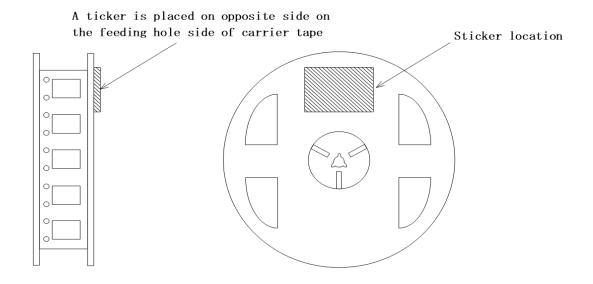


Control No.: ARP-482000-G

5

Issued on May 29, 2024

(9) Product orientation must be consistent. Products must not be positioned out of the mounting location.

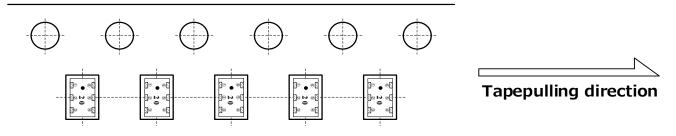

- (10) A taping reel must be sealed in a plastic bag, individually.
- (11) Tape-packaged quantity The quantity is 2,000 pcs per single tape-package as a rule.
- **Dimensions of the carrier tape (Unit: mm)**

